



XENOLUX

250 | 500 | 1000 | 1500 Ws

THE PROFESSIONAL
COMPACT SYSTEM
EXCEPTIONAL
IN PERFORMANCE
AND DESIGN

OVER
60
YEARS
OF GENUINE QUALITY

Multiblitz
+ MADE IN GERMANY



XENOLUX

250 | 500 | 1000 | 1500 Ws

XENOLUX FACTS

- + MIN. RECYCLING TIME 0.4 s
- + MIN. FLASH DURATION 1/2100 s
- + STABILIZED COLOR TEMPERATURE*
- + AUTODUMPING
- + INFINITELY VARIABLE FLASH OUTPUT
- + HALOGEN LIGHT PROPORTIONAL WITH 250 W (SERVICE LIFE 2000 H) OR 650 W
- + VARIABLE PHOTOCELL SENSITIVITY
- + ACOUSTIC OR OPTICAL FIRING MONITOR
- + KITS WITH TWO OR THREE FLASH UNITS IN RUGGED, PADDED CARRYING BAGS OR ALUMINUM CASES

* XENOLUX 1000 and XENOLUX 1500

Genuine Quality. Conceived, designed and manufactured in Germany.





VERSATILE. INGENIOUS. XENOLUX!

WHOEVER WISHES TO BRING LIGHT INTO DIGITAL PHOTOGRAPHY THESE DAYS NEEDS BRIGHT IDEAS, LOTS OF TALENT, AN OUTSTANDING CAMERA – AND XENOLUX BY MULTIBLITZ.

Be it still life, people or industrial photography or portraiture; be it in the studio or on location – there will always be light with XENOLUX. These extremely compact studio flash units are available in versions with 250 | 500 | 1000 | 1500 Ws. But that alone doesn't make them ideal partners for all kinds of digital photography. Their versatility and functionality makes these ergonomically designed studio flash units ideal companions on all your shoots.

Their easy-to-read control panel, for example, allows you vary light output over five f-stops. Brief re-cycling times with a minimum 0.4 s and flash durations up to 1/2100 s are possible.

The built-in photocell has two sensitivity settings to allow for small rooms just as easily as for outdoor working conditions. Color temperature is stabilized*. Additional useful features are plug-in flash tubes and a halogen focusing light of 250 to 650 W with separate proportionality. All flash units are fitted with the time-tried patented V-type bayonet mount giving access to our extensive line of light formers.



FORM FOLLOWS FUNCTION - THE CONTROL PANEL

01 Brilliant display reading to 1/10th f-stop 02 Infinitely variable flash output with halogen light 03 Reduction of photocell sensitivity 04 Photocell ON/OFF 05 Optical/acoustic flash monitor 06 Open-flash button 07 High-sensitivity photocell with integral IR receiver 08 Halogen light proportional or 100% 09 Halogen light proportional to flash output over entire XENOLUX Series 10 Halogen light ON / OFF 11 XENOLUX ON / OFF



ALL YOU NEED – INDOORS OR OUT.

If you wish to follow spontaneous ideas in the studio or have to cope with rapidly changing lighting conditions on location, all you have to do is turn to your personal XENOLUX kit.

We have assembled custom kits for all kinds of photography and shooting conditions, distinguishing between Location kits with two flash units and Comfort kits with three.

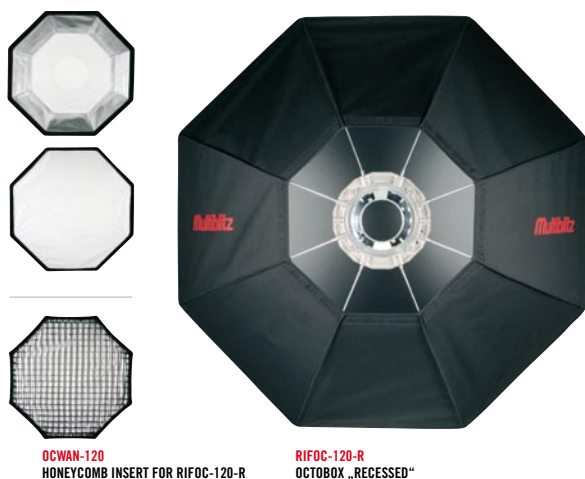
Especially compiled kits are available for every field of application:

THE COMFORT KITS:

Each XENOKOM Comfort kit comes with three flash units of identical power, such as three XENOLUX 1000 or three XENOLUX 1500. In addition to a reflector taking one of three different honeycomb filters, the kit includes a protective and umbrella reflector with brolly reflector and a soft box. With XENOKOM-2, 5 and 10 kits you may choose between a rugged aluminum case or a robust trolley nylon bag.

THE LOCATION KITS:

The kits come with two units and all necessary lamps and cables in a rugged bag. Any kit of flash units is just as good as the light formers that come with it. This is why a number of suitable light formers are supplied with each Location kit.



OCWAN-120
HONEYCOMB INSERT FOR RIFOC-120-R

RIFOC-120-R
OCTOBOX „RECESSED“

SIZE DOES MATTERS

Our impressive octo boxes with diameters from 120 - 254 cm are indispensable for professional shootings. Variations from diffusing panels and honeycomb inserts can be combined as desired.



COMFORT KITS

XENOKOM-2/-5/-10/-15

Comfortable. Triple performance for demanding tasks.

3 Units

(incl. flash-/halogen tube & protective cap)

- 1 Umbrella reflectors (STUSCH)
- 1 Reflective umbrellas (VARES)
- 1 Honeycomb reflector (LUNOS)
- 1 Honeycomb filter (LUWAN-M)
- 1 Softbox 65x65cm (LUFEX-65)
- 1 Sync cable (MASYG)
- 3 Power cable (VANET)
- 1 Aluminium case (XENOTRA)
- or optional:
- 1 Soft case (VATRA-3), for XENOKOM-2/-5/-10 only

Equipped with:

- 3x XENOLUX 250 = XENOKOM-2
- 3x XENOLUX 500 = XENOKOM-5
- 3x XENOLUX 1000 = XENOKOM-10
- 3x XENOLUX 1500 = XENOKOM-15



LOCATION KITS

XENOKIT-2/-5

Tried and trusted. For application on location.

2 Units

(incl. flash-/halogen tube & protective cap)

- 1 Honeycomb reflector (LUNOS)
- 3 Honeycomb filters, small, medium, large (LUWAN-S/-M/-L)
- 1 Softbox 65x65cm (LUFEX-65)
- 1 Sync cable (MASYG)
- 2 Power cable (VANET)
- 1 Soft case (XENOBAG)

Equipped with:

- 2x XENOLUX 250 = XENOKIT-2
- 2x XENOLUX 500 = XENOKIT-5





LOCATION-KITS

XENOKIT-10/-15

Tried and trusted. For application on location.

2 Units

- (incl. flash-/halogen tube & protective cap)
- 2 Umbrella reflectors (STUSCH)
- 2 Reflective umbrellas (VARES)
- 1 Sync cable (MASYG)
- 2 Power cable (VANET)
- 1 Soft case (STUBAG)

Equipped with:

- 2x XENOLUX 1000 = XENOKIT-10
- 2x XENOLUX 1500 = XENOKIT-15



2x



2x



2x



1x



2x



1x

STATIV-KITS

STAKIT-2/-3

- 2 Air-cushioned folding light stands (XENOSTA)
- or optional:
- 3 Air-cushioned folding light stands (XENOSTA)
- 1 Soft case (STABAG-100)



2x (optional 3x)



1x

PROFESSIONAL ACCESSORIES. ENDLESS POSSIBILITIES.

XENOLUX SYSTEM



UNIT



XENO-2*
flash unit, 250 Ws



XENO-5*
flash unit, 500 Ws



STUROR /STUROW
flash unit,
uncoated/coated
for XENO-2/-5



RARER /RAREW
flash unit,
uncoated/coated
for XENO-10/-15



LUHAL-3
halogen tube,
250 W
for XENO-2/-5



VAJOG-2
halogen tube,
650 W
for XENO-10/-15




XENO-10*
flash unit, 1000 Ws



XENO-15*
flash unit, 1500 Ws



LUKAP
protection cap



VANET
power cable



MASYG
sync lead























IMAGE BY: MANUEL THOMÉ (WWW.MANUELTHOME.DE) // MODEL: MARIKA (MODELPOOL)

XENOLUX SYSTEM



LIGHT SHAPERS

 <p>LUNOS honeycomb reflector, silver, 65°, ø 18 cm</p>	 <p>RIWAN-2 S/M-L honeycomb filters, for RINOS-2 / RINOW-2</p>	 <p>RINOS-2 honeycomb reflector, silver, 50°, ø 30 cm</p>	 <p>RIWAN-3 S/M-L honeycomb filters, for RINOS-3 / RINOW-3</p>	 <p>RINOS-3 honeycomb reflector, silver, 65°, ø 25 cm</p>	 <p>RIWANG-3 S/M-L honeycomb filters, for RIENG</p>	 <p>RIENG narrow-angle reflector, 35°, ø 33 cm</p>
 <p>STUSCH umbrella reflector 85°, ø 13 cm</p>	 <p>RISOF-2/-3 soft disc, ø 32 cm</p>	 <p>RIBUS snoot, with honey- comb insert</p>	 <p>RIVER background reflector, with filter clips, ø 30 cm</p>	 <p>RASTU FRESNEL spot, with integral diaphragm. lens ø 20 cm</p>	 <p>RISAB-24/-34 4-flap barn door, with filter clips for RINOS-2/-3, RINOW-2/-3</p>	
 <p>WABWEW honeycomb filter, REWEW for RIBEAU</p>	 <p>RIWEW soft beam reflector, white, 75°, ø 44 cm</p>	 <p>WEWSOF soft screen, for RIWEW & RIBEAU ø 44 cm</p>	 <p>RIBEAU beauty reflector, weiß, 75°, ø 44 cm</p>	 <p>COMWAL-1 honeycomb filter, for RIMUL-51</p>	 <p>RIMUL-51 light tab, 50 x 50 cm</p>	 <p>PROGLOB-25 360° „Lightball“, ø 50 cm</p>

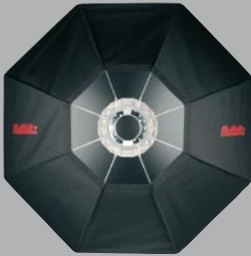
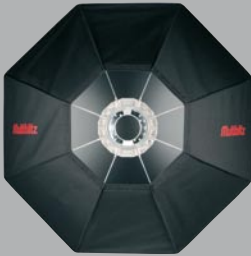
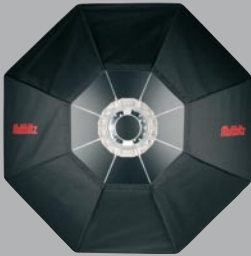
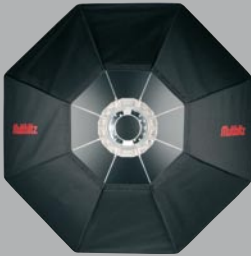












UMBRELLAS

AND ELECTRONIC ACCESSORIES

 <p>VAREU umbrella, reversible, silver/ white, ø 110 cm</p>	 <p>RESB0-S/-M umbrella, white, ø 80/100 cm</p>	 <p>VARES umbrella, white, ø 70 cm</p>	 <p>VATHRU umbrella, translucent, ø 80 cm</p>	 <p>STUSCH umbrella reflector 85°, ø 13 cm</p>	 <p>MURAS-R MURAS-T radio flash triggering system</p>	 <p>MUSEN IR trigger</p>
---	---	--	---	--	--	--

OCTOBXES

AND SOFTBOXES

 <p>RIFOC-120-R Octobox (Recessed), ø 120 cm</p>	 <p>RIFOC-150 Octobox, ø 150 cm</p>	 <p>RIFOC-213 Octobox, ø 213 cm</p>	 <p>RIFOC-254 Octobox, ø 254 cm</p>	 <p>RITUR-110 RIFEX-110 110 x 110 cm</p>	 <p>RITUR-80 RIFEX-80 80 x 80 cm</p>	 <p>RECWAN-80 RIREC-80 80 x 140 cm</p>	 <p>RECWAN-30 RIRIP-30 80 x 140 cm</p>
 <p>RIFEX-110 FEXWAN-110 110 x 110 cm</p>	 <p>RIFEX-80 FEXWAN-80 80 x 80 cm</p>	 <p>RIFEX-80 RIREC-80 80 x 140 cm</p>	 <p>RIFEX-80 RIREC-80 80 x 140 cm</p>	 <p>PROTUR-60 30 x 100 cm</p>	 <p>RIFEX-60 RECWAN-30 60 x 100 cm</p>	 <p>LUFEX-65 65 x 65 cm</p>	 <p>PROFLAP-60/-80/-100: Creative Kits, PROFEX-60 for PROFEX-60 PROFLAP-80 for PROFEX-80 PROFLAP-100 for PROFEX-100</p>



VISIT US ONLINE:
WWW.MULTIBLITZ.DE



XENOLUX TECHNICAL DATA

250

500

1000

1500



FLASH POWER:	~J(Ws)	250	500	1000	1500
POWER SUPPLY:	V	220 - 240			
F-STOP, 1M, ISO 100,	REFL.	45,8	64,8	90,9	128,4
GUIDE NUMBER, 1M, ISO 100,	RINOS-2/50°	60	85	123	147
CONTROL RANGE		5 F-STOPS			
IN 1/10 INCREMENTS:	~J(Ws)	15-250	30-500	60-1000	100-1500
RECYCLING TIME:	sec	0,4-1,3	0,4-1,4	0,4-1,4	0,4-1,8
FLASH DURATION T 0,5:	sec	1/500 - 1/850	1/1000 - 1/2100	1/1300 - 1/1200	1/1000 - 1/1850
FLASH TUBE, UV – ABSORBING:	CODE:	STUROW	STUROW	RAREW	RAREW
HALOGEN MODELLING LIGHT 100%:	W	250	250	650	650
HALOGEN TUBE:	W / V	250 / 230	250 / 230	650 / 240	650 / 240
	TYP	64479 AM (OSRAM) RH 250 TM (RADIUM)	64479 AM (OSRAM)	64540 (OSRAM)	64540 (OSRAM)
HALOGEN MODELLING LIGHT, VARIATION RANGE	W	15 - 250	15 - 250	40 - 650	40 - 650
FLASH TRIGGERIN:		RADIO, SYNC CABLE, OPEN FLASH BUTTON (TEST), INFRA-RED			
SYNC SOCKET, VOLTAGE:	V	12	12	12	12
CONNECTED LOAD:	A/VA (W)	6,3/1500	6,3/1500	10/2400	10/2400
FLASH VOLTAGE STABILITY:	%	+/- 1	+/- 1	+/- 1	+/- 1
ELECTRIC SAFETY:		RADIO INTERFERENCE SUPPRESSION ACCORDING TO CE, DIN IEC 491, VDE 0882			
DIMENSIONS:	mm	137 x 137	137 x 137	137 x 137	137 x 137
LENGTH (W/O):		365	365	417	470
WEIGHT:	kg	3,1	3,4	4,3	5,0

Tolerances of the technical data for measured values and components according to the standard DIN IEC // Subject to technical changes